



Flashblend Mixers

Capacity

Powder incorporation rates up to 30,000 lbs/hr.

Materials of Construction

All product contact parts are constructed in 316 stainless steel.

Motor Specification

The standard range of motors include TEFC and washdown duty. Stainless steel motors are available on request.

Cleaning

The Flashblend is designed to be Cleaned In Place (CIP) with Sterilize In Place (SIP) as an optional extra.

Electrical

Integral stainless steel control panel.


Sealing

Single mechanical shaft seals as standard. Double mechanical shaft seals and specialized arrangements are optional extras.



Powder/Liquid Mixers Technical Info

Model	A	B	C	Total Power HP	Typical Powder Flow Rate lbs/min	Standard Hopper Volume cu ft.
FLB 20	57	25 ½	41	8 ½	30	0.35
FLB 30	49 ½	39 ½	52 ½	17 ½	50-100	3.5
FLB 45	71	40 ½	73	30	125-250	10.5
FLB 60	79	40 ½	75	50	300-550	10.5

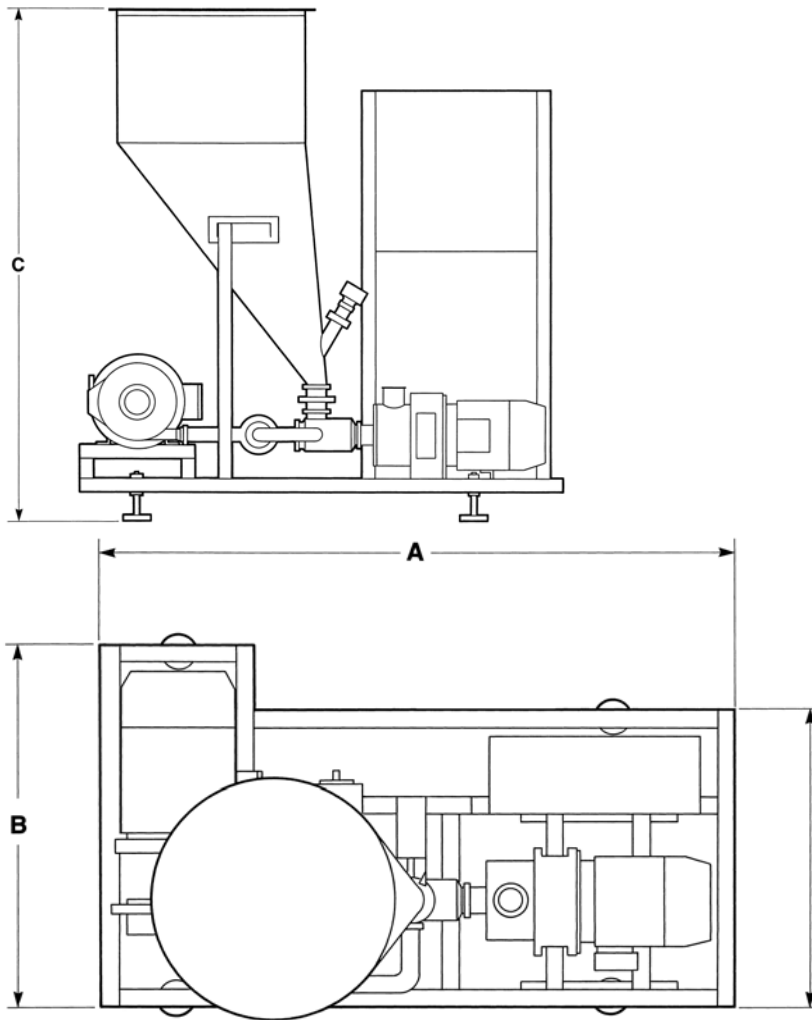

All dimensions are in inches. Silverson reserves the right to change dimensions and specifications without notice. Powder flowrates are dependent on product characteristics. The dimensions shown are approximate and certified drawings should be used for installation purposes.